

AN ISO 9001:2015 CERTIFIED COMPANY



TECH PLASTTM
TESTING MACHINES



 www.thetechplast.com

**MFG. &
EXPORTER OF POLYMER
TESTING MACHINES**



COMPANY INTRODUCTION

ABOUT US

Since 2019, Our Team Has Succeeded In Understanding The Needs Of The Industry And Creating Reliable Products To Serve Them All. We Techplast Testing Machines, Are A Prominent Plastic Testing Equipment Manufacturing Companies Of India Based In Ahmedabad (gujarat). Techplast Testing Machines, Is A Family Owned And Operated Business. We Treat All Of Customers An Integral Part Of Family. At Techplast, We Just Don't Sell Equipments, We Provide Solutions. We Just Don't Make Clients, We Make Friends. Our Commitment To Offer A Complete Range Of Efficient Plastic Testing Equipments Has Got Only Stronger And Stronger. We Maintain Our Exceptional Quality Of Plastic Testing Equipments With Zero-tolerance To Error. Our Products Are Not Only Adhering To The Stringent National And International Standards.

WHY CHOOSE US ?

We Have Achieved A Remarkable And Strong Position In The Market Due To Our Excellent Quality Range Of Products That We Provide In Several Specification.

Following Are The Some Of The Unique Reasons Due To Which We Have Achieved The Belief Of Our Valued Patrons

MISSION & VISION

We believe that we are on the face of the earth to make great products and that's not changing. We are constantly focusing on innovating. We believe in the simple not the complex. We believe that we need to own and control the primary technologies behind the products that we make, and participate only in markets where we can make a significant contribution. We believe in saying no to thousands of projects, so that we can really focus on the few that are truly important and meaningful to us. We believe in deep collaboration and cross-pollination of our groups, which allow us to innovate in a way that others cannot. And frankly, we don't settle for anything less than excellence in every group in the company

INDUSTRY WE FOLLOW

- PVC PIPE TESTING IS : 4985 | EN:1401 | EN:1452
- C-PVC PIPE TESTING IS: 15778
- U-PVC PIPE TESTING ASTM D:1785 | IS: 12335 (PART 9)
- R-PVC PIPE TESTING IS: 4985
- PVC FLEXIBLE HOSE PIPE TESTING IS: 15265
- PVC SEWAGE PIPE TESTING IS: 15328
- HDPE PIPE TESTING IS: 4984 | IS: 4984
- MDPE PIPE TESTING IS: 14885 | ISO:4437
- LLDPE PIPE TESTING IS: 12786 | IS: 13488
- PE WATER PIPE TESTING ISO: 4427 | EN: 12201
- PE STRUCTURED WALL PIPE TESTING EN: 13476
- PE GAS PIPE TESTING ISO: 4437 | EN: 1555
- PEX-AL-PEX PIPE TESTING ISO: 15875 | ASTM F: 1281
- SPRINKLER PIPE TESTING IS: 14151
- PP-R PIPW TESTING IS: 15801
- HOSE PIPE TESTING IS: 15265
- PP FOR HOT & COLD WATER PIPE ISO: 15874 | ISO: 21003
- INLINE / ONLINE EMITTERS & LATERAL PIPE IS: 13488 | IS: 12786
- SWR PIPE TESTING IS: 13592
- SWR FITTINGS IS : 147735
- CASTING PIPE TESTING IS: 12818
- DWC PIPE TESTING IS: 14930[(P-2)/GR/DWC-34/03/01]
- PLB DUCT TESTING (AS PER DOT STANDARD)
- ELECTRICAL CONDUITS TESTING IS: 9537 (PART - 1& 3)
- MULTI- LAYER CO-EXTRUITS FILM TESTING IS: 2508 | IS: 2530
- INJECTION, BLOW & ROTATIONAL MOLDING
- ROTATIONAL MOLDED WATER TANK TESTING IS: 12701
- TEXTILE-TARAPaulin IS: 7903 | IS: 706 (P-8) | IS: 15351
- SOLVENT CEMENT JOINTS FOR WATER SUPPLIER TESTING IS: 7834 VALVE (PP, PVC, PE... ETC)
- CABLE WIRE & ROPE
- STREP (PET,PP)
- COMPOUNDING & MASTER BATCH | WOOD & LAMINATES
- FRP/ GRP PIPES & PRODUCTS TESTING EQUIPMENT
- PHARMA INDUSTRIES TEXTILE & YARN TESTING EQUIPMENT
- RUBBER TESTING EQUIPMENT
- PAPER & PACKAGING EQUIPMENT

OUR COMPANY PRODUCT



TENSILE TESTING MACHINE

SPECIFICATION	
Load cells Capacity	: UP TO 5000 kg.*
No. of load cell	: Optional One or Two.
Cross Travel	: up to 600 mm
Horizontal day light	: 700 mm
Speed	: 1mm/Minute to 500mm/Minute
Paint	: Powder coated
Power	: 440 Volts, 50Hz, Three phase.

UNIVERSAL TESTING MACHINE

SPECIFICATION	
Load capacity	: Up to 5000 kg*
No. Of load cell	: One
Cross travel	: Up to 700 mm
Speed	: 1 MM/minute to 500MM/minute
Paint	: Powder Coating
Power supply	: 440 Volts, 50 Hz, 3 Phase



PUNCTURE RESISTANCE TESTER MANUFACTURERS

SPECIFICATION	
Load capacity	: Load Capacity: 20 kg to 5000 Kg
Speed	: Variable with AC frequency drive
Speed	: 1 TO 100 mm/min
Minimum Grip Separation	: 25 mm
Maximum Grip Separation	: 700 mm
Puncture grip	: 01 Set
Extension meter	: Least count of 1 mm through proximity/encoder switch
Paint	: Powder Coating
Power	: 230 V / 50 Hz & 440V Ac/ 3 phase, + N, E.




SEALING / BOND /PEEL STRENGTH TESTER

SPECIFICATION	
Load capacity	: 50 kg*
No. Of load cell	: One
Cross travel	: 500 mm
Speed	: 1 mm/min To 500mm/min
Paint	: Powder coated
Power supply	: 1 Phase, 230V Ac, 50 HZ

TENSILE WITH C.O.F TESTER

SPECIFICATION	
Load Cell 1 Capacity	: 1000 Gram
Loadcell 2 Capacity	: 20 Kgf
COF Test Assembly	: 01 Set
Tensile Grip	: 01 Set
Pre-Set Speed	: 10 TO 500 mm/min
No. Of load cell	: One
Paint	: Powder Coating
Power	: 230V Ac / 50 HZ

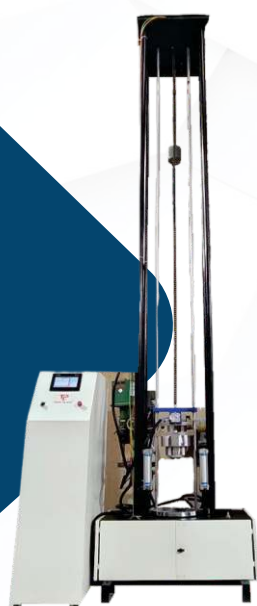

MOTORISED IMPACT TESTER (UL-651)

SPECIFICATION	
The impact height may be set between 100mm to 3350mm	
Height error	: ± 3 mm
Striker rising speed	: 12m/min
Striker weight	: 9.1kg (51) and 34kg (150)
Test specimen {outside diameter	: Powder Coating
Length	: 3350mm
Operation	: Automatic
Pneumatic Cylinder	: 02 Nos - 50 x 160 mm
Solenoid Pneumatic Valve	: ¼ Bsp thread and 5/2 Connection
Base and Top Structure	: 16 mm M.s Plate
Paint	: Powder Coating
Power	: 230 V AC/ 50 Hz



AUTO MELT FLOW INDEX TESTER

SPECIFICATION	
Temperature Controller :	Microprocessor based Digital Temperature
Accessories	: Orifice, Piston, Material charger, Barrel Cleaner, Orifice cleaner, Sample Cutter.
Weights	: 2.16 Kg & 5 Kg hard chrome plated weights
Amperes	: 4 Amps
Paint	: Powder coated
Power supply	: 230 Volts, 50Hz
Timer	: Microprocessor based Digital Timer With range up to 999.9 Seconds and having Preset facility and Buzzer output.

CO-EFFICIENT FRICTION TESTER

SPECIFICATION	
Capacity	: Up to 9.999 kg.
Direct display	: Static and kinetic friction values
Speed	: 150mm/minute
Weight of sled	: 200 grams
Accessories	: Three nos. of S.S templates
Paint	: Powder coated
Power supply	: 230 Volts, 50Hz, Single Phase.



DIGITAL HYDROSTATIC PRESSURE TESTER

SPECIFICATION	
Pressure range	: 0 – 100 bar*
Pressure input	: Through compressed air having pressure upto 5 kg/cm.sq
Pressure output	: Through hydro-pneumatic pump
No. of stations	: 8 nos
Time range	: 0 – 999.9 hours
Paint	: Powder coated
Power supply	: 230 Volts, 50Hz, Single Phase.



HOT AIR OVEN

SPECIFICATION	
Size of the working chamber	: 12 inch X 12 inch X 12 inch*
Material of construction	: M.S.
Temperature range	: Ambient to 250°C.
Paint	: Powder coated
Power supply	: 230 Volts, 50Hz

MOTORIZED NOTCH CUTTER

SPECIFICATION	
Depth of Notch	: Up to 5 mm
Range	: 0-25mm with L.C of 0.01 mm
Sample Size	: 63.5 x 12.7
Cutting angle	: 45 degree
Motor	: 1/5 HP, Single Phase
Applications	: Plastic Sheets
Paint	: Powder coated
Power	: 220 Volt, 50 Hz, Single Phase



MOISTURE ANALYZER

SPECIFICATION	
Halogen or infrared (AGS/IR) radiators	
Graphical display	
Text menu	
Drying chart displaying	
Reports edition with computer keyboard	
Power	: 230 VAC/50 HZ
Capacity	: 60g - 110g

CARBON BLACK CONTENT TESTER

SPECIFICATION	
Temperature Range	: Ambient to 800 C
Temperature Least Count	: 1 C, Accuracy + 5 C
Type of sensor	: K type
PID Controller make	: PPI Omnix +48
Paint	: Powder coated
Power supply	: 230 Volts, 50Hz





MUFFLE FURNACE

SPECIFICATION	
Inner Chamber Size	: 9" x 4" x 4"
Temperature Range	: Ambient to 900 C
Temperature Least Count	: 1 C, Accuracy + 5 C
Insulation	: Glass wool
Type of sensor	: K type

HEAT SEAL TESTER

SPECIFICATION	
Temperature zone	: Two zone
Controller	: Auto tuned PID controller with temperature range
Clamping Jaws	: One fixed and second movable by pneumatic action.
Adjustable temperature	: 0- 199.9°C(Digital P.I.D Controller)
Adjustable dwell time	: 0-9.99 seconds (Digital Display)
Sealing Depth	: 6mm / 8 mm 11o mm / 12 mm or as desired.
Sealing Length	: 2 / 4 / 6 / 8/ 10/ 12 Inches or as desired.
Power requirement	: 230 Volts, 60 Hz, Single phase – 16ampere.



IMPACT TETSER

SPECIFICATION	
Height of fall	: 500mm, 1000mm and 2000mm.
Weight of striker	: 250 grams, 500 grams and 1000 grams.
Material of striker	: S.S
Angle of "V" block	: 120°
Release mechanism of striker	: Manual.
Paint	: Powder coated

V-ICAT SOFTENING POINT APPARATUS




SPECIFICATION	
Temperature range	: From ambient to 300 °C.
No of stations	: With Options Of 2 Stations to 6 Stations
Material of construction	: Inner bath: S.S
Outer body	: M.S
Rate of heating	: 120 °C / hour and 50 °C / hour.
Sensor	: Range up to 10mm with resolution of 0.01mm.
Paint	: Powder coated.
Power	: 230 Volts, 50Hz, single phase.

FREE FALLING DART IMPACT TESTER FOR FILM

SPECIFICATION	
Material of construction	: S.S
Counter	: Digital counter 9999 count
Weights	: 5 gram to 500 gram (Aluminium and S.S)
Paint	: Powder coated
Power	: 230 V AC/50 Hz



HUMIDITY CHAMBER

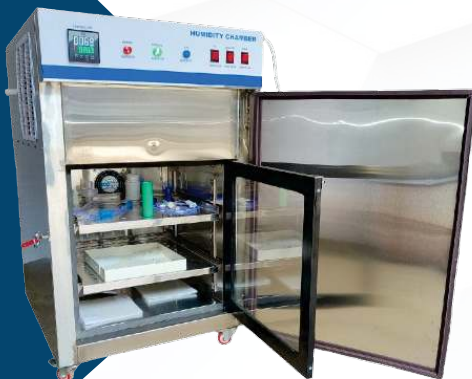

SPECIFICATION	
Size of the working chamber	: 18 inch X 18 inch x 24 inch*
Material of construction	: Inner bath : S.S / Outer body : M.S
Humidity range	: 20% RH to 95% RH.
Temperature range	: 10°C to 85°C
Paint	: Powder coated
Power	: 230 Volts, 50 Hz, Single phase.



DIGITAL DENSITY WITH MICRO BALANCE

SPECIFICATION	
Weighing balance range	: 220 grams
Resolution	: 1 milligram or 0.1 mg
Accessories	: Beaker, stand sinker & thread
Paint	: Powder coated
Power	: 230 Volts, 50Hz, single phase

OPACITY TESTER

SPECIFICATION	
Range	: 0 – 99.9 % opaque.
Direct display	: % opaque.
Paint	: Powder coated
Power	: 230 V AC/50 Hz single phase



IZOD / CHARPY TESTER

SPECIFICATION	
Capacity	: Up to 25.00 Joules
Release angle of pendulum	: 150 degree.
Range of four scales	: 0-2.71 Joules, 0-5.42 Joules, 0-10.84 Joules, 0-21.68 Joules and 0-25.00 Joules.
Minimum resolution on scale	: 0.02 Joule, 0.05 Joule, 0.1 Joule, 0.2 Joule and 0.2 Joule respectively.
Paint	: Powder coated
Power	: 230 Volts, 50 Hz, Single phase.

E.S.C.R TESTER



SPECIFICATION	
Temperature range	: 0-200 °C.
Timer range	: 999.9 hours
Accessories	: Cutting die, nicking jig, bending cum transfer tool, specimen holder, test tube & rubber cork
Water circulation	: Through induction motor with stirrer
Inner Body	: S.S Body
Outer Body	: M.S Body
Testing capacity	: 6 tests at a time
Paint	: Powder coated
Power	: 230 Volts, 50Hz, single phase.

VACUUM LEAKAGE TESTER

SPECIFICATION
Vacuum adjustable up to -760 mm-Hg
Box made of polished transparent PMMA (very rugged)
Easy to use and safe
2 stage vacuum and holding time setting Accuracy 0.5% of the measure
Delivered with vacuum generator
Customised Box with dimensions upon request



DIGITAL BURSTING STRENGTH TESTER



SPECIFICATION	
Capacity	: 40Kg/ Cm2
Display resolution	: 0.0 1Kg/ cm2
Pump Flow Rate	: 95 + 5 ml/min for paper, 170 + 15 ml/min
Least Count	: 0.1kg/cm2
Accuracy	: + 1% of Read Out Value
Accessories	: 11 No Diaphragm No Aluminum Foil For calibration,
	: 1 No Spanner(key)
	: 1 No power cable,
	: 1 bottle Oil,



GSM WEIGHING BALANCE WITH ROUND CUTTER

SPECIFICATION	
Range	: 0 to 300 gram
L.C	: 0.01 Gram
Template Size	: 100 x 100 mm ² (Square)
Power Supply	: 230 V AC/50Hz

LAB MODEL HYDRAULIC COMPRESSION MOULDING PRESS

SPECIFICATION	
Main Body	: M.S Body
Platen Size	: 200 mm × 200 mm
Maximum Temperature Range	: ambient to 300 C
Cylinder Stock	: 200 mm
Heating Load	: 1.2 Kw/Platen
Maximum Pressure	: 120 bar
	: Hydraulic Cylinder for making sheets
	: Limit switch for cutting off lower stock
Spare Die For Making Sheet	: 2 mm, 3mm, 4mm
	: Pressure switch for maintain pressure
	: Proximity sensor for double safety purpose
	: Solenoid vale with relay for forward and reverse
	: Platen type heater for heating the granules
Corrugated Pipe For Cooling	: 04 No's (2 meter)
	: Hydraulic power pack for operating machine.
Motor Capacity	: 2 Hp
	: Digital PID Temperature Controller
Controller Make	: Selec
Digital Timer Make	: Selec
Power Supply	: 380 V AC / 60 Hz +N, E



CARBON BLACK DISPERSION TESTER

SPECIFICATION	
Temperature range	: Ambient to 200°C.
Paint	: Powder coated
Power	: 230 Volts, 50 Hz, Single phase.

HYDRAULIC DENSITY PRESS

SPECIFICATION	
Temperature Controller For Both Platens	
Temp. Range	: 200 Deg C
Pressure	: 10 Tons
Pressure Gauge	: Dial Indication
Cooling	: Chilled water
Pressure by	: Manual hydraulic jack of 10 ton
Paint	: Powder coated
Power	: 230 VA/C, 50 Hzs



OIL BATH FOR REVERSION TEST

SPECIFICATION	
Material of construction	: M.S
Inner Body	: S.S
Temperature Range	: Ambient to 250°C
Least Count	: 0.10C
Size	: 4ft. X 1ft. X 1.5ft., 4ft. X 3ft. X 1.5ft., 6ft. X 4ft.
Paint	: Powder coated.
Power	: 230 V AC/50Hz, 440 V AC/3 Phase


FREEZER

SPECIFICATION	
Material of construction	: S.S
Inner Body	: S.S
Temperature Range	: Ambient to -5
Paint	: Powder coated
Power	: 230 V AC/50 Hz



VACUUM OVEN

SPECIFICATION	
Temperature Controller Range	: Ambient to 95°C
Vacuum Range	: As per Requirement
Body	: M. S
Paint	: Powder coated
Power Supply	: 230 V Ac/50Hz

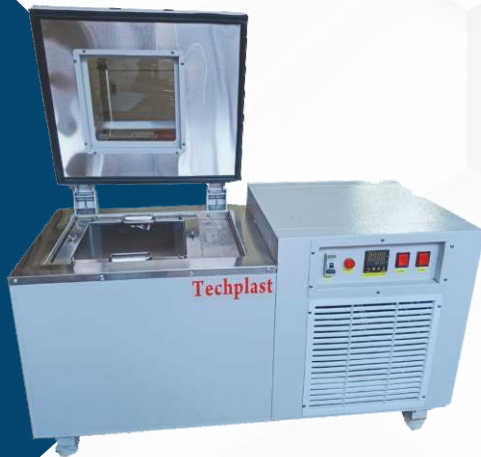

DIGITAL DICHLOROMETHANE TESTER FOR PVC PIPE

SPECIFICATION	
Temperature Controller	: Up to 120°C
Inner water tank Size	: 450mm x 450mm x 450mm (LxBxH)
Outer size of water bath	: 500mm x 500mm x 500mm (LxBxH)
Material Construction	: Inner S.S. and outer M.S. body
Circulation	: Through Reputed Make Motor
Paint	: Powder Coated
Power	: 230V AC, Single Phase

HOT AND COLD - WATER BATH

SPECIFICATION	
Temperature Controller	: Digital PID Controller With Range Up to 95
Size Of The Inner Bath	: 48"X 30"X 18".
Controller Make	: Digital Controller With Range Ambient To 27
Circulation	: Water Pump
Insulation	: PUF With Insulated Hydraulic Door
Temperature Range	: Ambient To 20
Paint	: Powder Coating





DIGITAL VISCOSITY BATH

SPECIFICATION	
Temperature Range	: 20°C to 150°C
Control Accuracy	: +0.05°C or 0.25% of FS.
Resolution	: 0.1 \ 0.01°C
Chamber Size	: 200 x 260 x 350, 370 x 260 x 350
LTR	: 28, 40
Suitable For	: 4 VM, 6VM
Power	: 230V AC/Single Phase

DUMBBELL PRESS (5T)


SPECIFICATION	
Capacity	: 5 Ton
Paint	: Powder Coated
Power	: Manually Operated



TWO ROLL MILL

SPECIFICATION	
Main Body	: M.S Body
Roller Size	: 150mm(D) x 250 mm (L)
Nip Gap	: 0.3 mm to 6.00 mm
Heating Load	: 2.6 Kw/ Roller
Drive	: Danfoss FC-51 (2 Hp)
Motor Detail	: 2HP
	: Specially Designed Displacement Meter
Nip Gap	: LVDT Sensor For Nip Gap
Slip Ring	: Copper Slip Rings For Transferring Heater
	: And Temperature Inputs To Controller.
Motor Make	: Rotomotive
Gear Box Make	: Rotomotive
Gear Box	: 20:1
Temperature Controller Make	: Techplast
Power Supply	: 440 V AC / +N, E
Paint	: Powder Coated



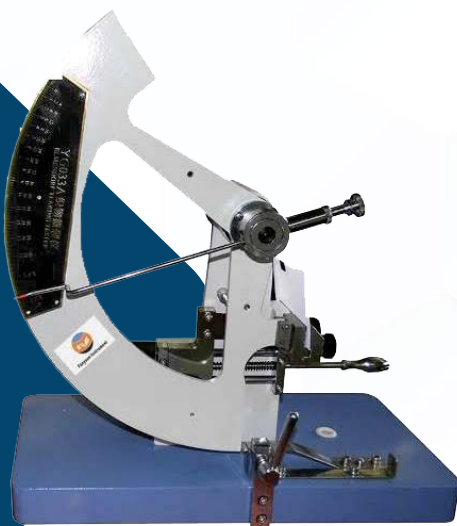

ELMENDORF TEAR TESTER

SPECIFICATION	
Tearing Distance	: 43 +/-0.15mm
Size of Slit	: 20mm
Reading of Scale	: 0 to 100% Range
Range of Weights	: 1600, 3200, 6400 gram
Scale Reading	: 0 to 100% of range
Accuracy	: ± 2% within entire range
Least count of scale	: 1%
Pendulum Release Mechanism	: Manual through brake release pin
Finish	: Powder coat

DIGITAL TORQUE TESTER

SPECIFICATION	
Torque Range	: 0 To 20 N.M
Model	: Table Top Model,
Minimum holding	: 15 mm
Maximum Holding	: 110 mm
Paint	: Powder Coating
Power	: 230 V AC, 50 Hzs.1 phase (OR AS PER REQUIREMENT)



COLOR MATCHING CABINET

SPECIFICATION	
Light Source	: CWE, D 65, TL 84, UVB, TF LIGHT
Body	: M.S Powder Coated
Power	: 230 V AC, 50 Hz



FLAMMABILITY TESTER

SPECIFICATION	
Specimen Size	: 1/2"X5" Horizontal And Vertical Burning Test
Accuracy	: $\pm 2\%$ At Full Range
Specimen Holder Angle	: 45° & 90°
Material	: Stainless Steel
Digital Timer Range	: 999.9 Second
Digital Timer Least Count	: - 0.1 Second
Igniting Flame Length	: 20mm \pm 1
Power	: 220V, Single Phase, 50 Hz

FOUR CELL AGEING OVENS

SPECIFICATION	
Capacity	: 4 cell
Oven Type	: Box Type
Temperature	: 200-300 deg. Celsius
Material	: Mild Steel
Power	: 230 V Ac



LAB MODEL BLOWN FILM PLANT

SPECIFICATION	
Special Compact Design for Lab Purpose Blown Film Plant	
25 MM Extruder With L.D/L.L. And H.M/L.L. Blown Film Dies	
25 mm Extruder with LL/LD, HM/HD	
PID Controls and Variable Drives	
Compact Panel Attached to The Machine	
Film width	: 25 mm to 150 mm
Film Thickness	: 10 Micron to 100 Micron
Power	: 440 V Ac/ 3 phase

EMITTER FLOW RATE VARIATION TESTER

SPECIFICATION	
Digital Microprocessor based Pressure Controller Cum Timer	
Pressure Gauge	: 05 No's (2.5 Bar)
Pressure Transducer	: 10 Bar
No of Sample test at one time	: 25 Sample
Water pump	: 0.5 Hp / 230 V Ac
Measuring Cylinder with flask	: 25 No's
Timer Range	: 999.9 minute
Power	: 230 V Ac / 50 Hz



DICHLOROMETHANE BATH

SPECIFICATION	
Temperature Controller	: Digital PID Controller with range up to 12oC
Inner water tank Size	: 450mm x 450mm x 450mm (LxBxH)
Outer size of water bath	: 500mm x 500mm x 500mm (LxBxH)
Material Construction	: Inner S.S. and outer M.S. body with Powder Coated.
Cooling Load	: Cooling Through Reputed Make Compressor
Circulation	: Through Reputed Make Motor
Insulation	: Glass wool
Power Supply	: 230V AC, Single Phase

HOT WATER BATH

SPECIFICATION	
Temperature Controller	: Ambient to 95 deg C. / accuracy: + 1 degree C
Controller make	: PPI Omnix +48
Inner S.S chamber size	: 48" x 30" x 18"
Outer body	: M.S.
Load	: 4.0 KW
Paint	: Powder coated
Power Supply	: 3 phase, 440 V AC
Circulation through Crompton motor	





POUCH BURST TESTER

SPECIFICATION	
Capacity	: 500 Kgf
Least Count	: 0.1 Kgf
Accuracy	: 0.2% of Full Scale (i.e. 1 Kgf)
Platform Size	: 200 x 200 mm With Max Pouch Size Of 200 x 200 x 45mm
Platform Size	: 400x400 mm With Max Pouch Size Of 400 x 400 x 95mm
Power	: 230 v Ac / 50 Hz.

V NOTCH CUTTER

SPECIFICATION	
Applicable For	: HDPE Pipe up to Ø400mm
Cutter Type	: Hardened tool having cutting angle of 60°
Cutting Ratio	: Available @ of 0.010 +/- 0.002 mm/rev/tooth
Notching Capacity	: Depth up to 15mm vide width of 400mm
Movement	: Horizontal & vertical movement thorough Induction motor
Paint	: Powder coated
Power	: 440v AC, 3 Phase, 50 Hz



DIN ABRASION TESTER

SPECIFICATION	
Load Weight	: 5N,10N
Roll Dim	: Diameter 150mm, Length 460mm
Rotation Speed	: 40rpm
Moving Distance Of The Holder	: 4.2mm Each Rotation





RING GAUGES FOR CONDUITS




PISTON GAUGES FOR CONDUIT
PIPES




OPTICAL DENSITOMETER



BENDING TEST APPARATUS FOR
CONDUIT PIPE

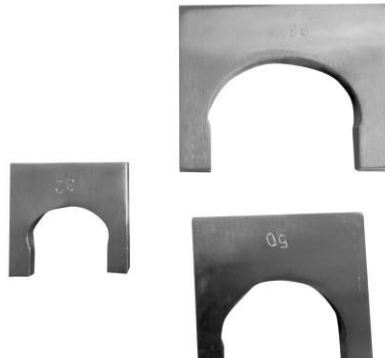

C GAUGES FOR CONDUIT

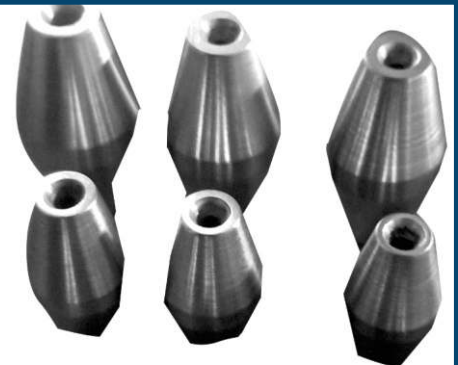


CONE GAUGES FOR CONDUIT PIPE



END CAPS FOR PIPES



BALL POINT TEST APPARATUS

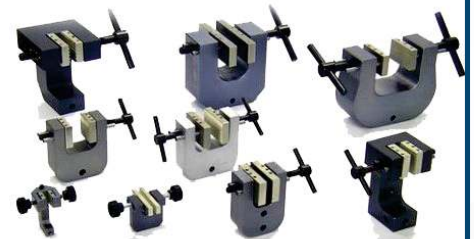

GRIP ATTACHMENT



DIGITAL THICKNESS GAUGE



DIGITAL HARDNESS TESTER



IMPACT TESTER FOR
CONDUIT PIPE



TOP LOAD TESTER MACHINE



YARN TENSILE TESTING MACHINE



PLASTIC SPOOL TESTING INSTRUMENTS



PIPE COMPRESSION STRENGTH TESTER



RUBBER TENSILE TESTING MACHINE



SPRING LOAD TESTING MACHINE



PIPE STRENGTH TESTING MACHINE



TRAPEZOIDAL TEAR STRENGTH TESTER




WIRE TENSILE TESTING MACHINE



FABRIC STRENGTH TESTER



FLEXURAL STRENGTH TESTING MACHINE

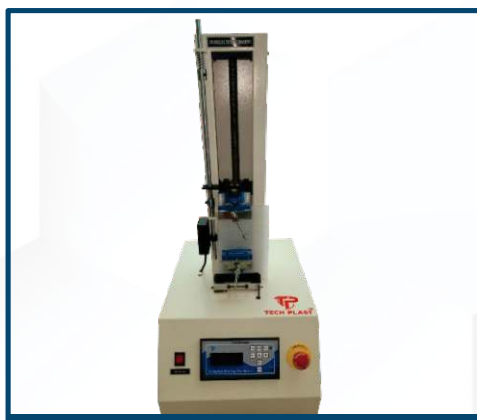

HAIR STRENGTH TENSILE TESTER



METAL TENSILE STRENGTH TESTER



MOE/MOR STRENGTH TESTER



TRAVELLING MICROSCOPE



HDPE / PP / LDPE DRUM COMPRESSION TESTER



PET BOTTLE COMPRESSION TESTER




BOX COMPRESSION TESTER



TECH PLAST™
TESTING MACHINES

OUR SUPPLY CHAIN



📞 Ronak Parekh : +91 96629 90842 | Amit Panchal : +91 8128716264

📍 Address: Shed no : 01, Vinayak Industrial Estate-3, Opp. Krishna way Bridge,
Near Asudev Circle , B/H Mahavir estate, Kathwada Singarva Road 382430

✉ sales@techplastgroup.com 🌐 www.thetechplast.com

QUALITY IS NOT AN ACT. IT IS A HABIT